


As a necessary choice for quantitative analysis of molecular biology, real-time PCR system has been widely used in various fields such as scientific research, clinical detection and diagnosis, quality and safety testing, and forensic applications.

Accurate 96 Real-Time PCR System

Features

- Up to 6 fluorescence detection channels allowing multiplex PCR.
- Effectively reduce multi-color crosstalk and edge effect, no ROX correction required to reduce sample and reagent use
- Innovative scanning method and time-resolved signal separation technology to improve detection sensitivity
- Unique edge temperature compensation technology to minimize "edge effect"
- User-friendly software
- Innovative technology with long-lasting LED light provides reliability results

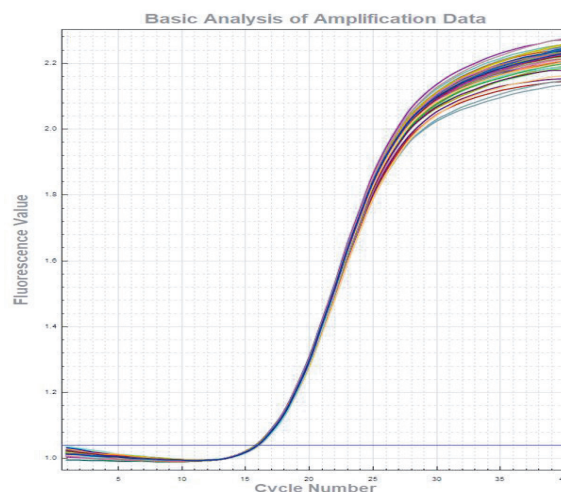

Channel 6	Channel 5	Channel 4
NED/Cy3/TAMRA 543 ± 20 / 584 ± 20	ROX/Texas Red 571 ± 20 / 610 ± 20	FAM/SYBR 480 ± 10 / 518 ± 10
VIC/HEX/TET/JOE 532 ± 10 / 564 ± 20	CY5/Quasar 670 640 ± 20 / 692 ± 40	FAM/SYBR 480 ± 10 / 518 ± 10
Channel 3	Channel 2	Channel 1

Technical Parameters

Temperature control system		Detection system	
Sample capacity	0.1ml PCR tubes×96, 8×12 PCR plate or 96 well plate ×1	Excitation light source	5/6 monochrome high efficiency LEDs
Reaction volume	10-50 μl	Detection device	PMT
Thermal cycle technology	Peltier	Detection mode	Time-resolved signal separating technology
Max. Heating/Cooling rate	6.0° C/s	Excitation/detection wavelength range	455-650nm/510-715nm
Heating temperature range	4 – 100 °C	Fluorescent channels	4/6 channels
Temperature accuracy	± 0.2°C	Supported dye	FAM/SYBR Green,VIC/HEX ROX,Cy5,Cy3(only for x6)
Temperature uniformity	±0.2°C @60°C , ±0.2°C @95°C	Sensitivity	Single copy gene
Temperature gradient setting range	30-100°C	Resolution	1.33 folds copy number difference can be distinguished in single-plex qPCR
Temperature gradient difference setting range	1 – 36°C	Dynamic range	10 orders of magnitude copies

* For research use only, not for use in diagnostic procedures.

